



www.cnc-world.com






MOBILE AND INDUSTRIAL HYDRAULIC

CNC CHF SERIES HYDRAULIC LINE TYPE FILTERS «SPIN ON»



TECHNICAL DATA

Construction	Aluminium Head
Sealing	Steel Sleeve
Max. Working Pressure	8 bar
Working Temperature	-10°C~ +100°C
Fluid	Mineral Oils
Nominal Flow Rate	35~200lt/min.
Bypass opening pressure	1,50 bar
Filtration Range	10μ/25μ
Connection Size	1/2"-3/4"-1"-1 1/4"

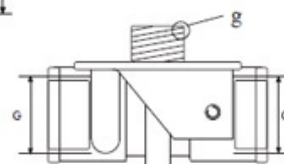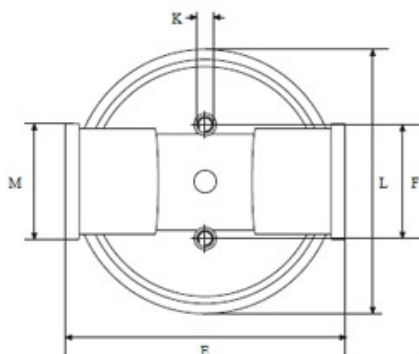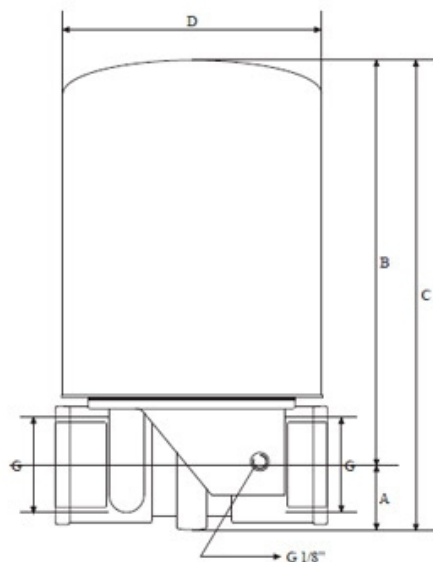

PRODUCT CODE	Flow Lt/dk.	G	A	B	C	D	E	F	K	L	M	ELEMENT CODE	Filtration Range	Connection Size
CHF10-25	35	1/2"	24	118	140	94	94	38	M6	95	41	GAE10-25	25μ	3/4"x16
CHF20-10	55	3/4"	24	163	183	94	94	38	M6	95	41	GAE20-10	10μ	1"x12
CHF20-25	65	3/4"	24	163	183	94	94	38	M6	95	41	GAE20-25	25μ	1"x12
CHF30-10	55	1"	24	163	183	94	94	38	M6	95	41	GAE20-10	10μ	1"x12
CHF30-25	65	1"	24	163	183	94	94	38	M6	95	41	GAE20-25	25μ	1"x12
CHF21-10	70	3/4"	24	238	258	94	94	38	M6	95	41	GAE21-10	10μ	1"x12
CHF21-25	80	3/4"	24	238	258	94	94	38	M6	95	41	GAE21-25	25μ	1"x12
CHF31-10	70	1"	24	238	258	94	94	38	M6	95	41	GAE21-10	10μ	1"x12
CHF31-25	80	1"	24	238	258	94	94	38	M6	95	41	GAE21-25	25μ	1"x12
CHF40-10	115	1 1/4"	32	218	245	127	134	50	M8	180	57	GAE40-10	10μ	1 1/4"
CHF40-25	150	1 1/4"	32	218	245	127	134	50	M8	180	57	GAE40-25	25μ	1 1/4"
CHF50-25	200	1 1/4"	32	342	370	135	134	50	M8	138	57	GAE50-25	25μ	1 1/2"x16