

CNC 10000 HYDRAULIC WINCH





- * MAXIMUM PULL FORCE: 10.000 kg
- * MAXIMUM ROPE LENGTH: 46 mt
- * MAXIMUM ROPE DIAMETER: 16 mm
- * HYDROMOTOR: WR-160 cc
- * MAXIMUM OPERATING PRESSURE: 170 bar
- * MAXIMUM PUMP FLOW: 60 lt/min
- * CONVERSION RATIO: 21:1
- * RECOMMENDED OIL: 80 W 90 / 1 lt
- * PRODUCT WEIGHT: 150 kg
- * LONG-LIFE HYDRAULIC BRAKE SYSTEM POWERED BY MULTIPLE DISCS.
- * THROUGH HEAT TREATMENT EXTRA RAINFORCE PLANETARY GEAR SYSTEM MADE OF SPECIAL STEEL
- * HIGH STRENGTH CASTING BODY AND CAST ROLLER.
- * HIGH TORQUE HYDROMOTOR.



NUMBER OF ROPE WRAPS	PULL CAPACITY	ROPE PULLING CAPACITY	ROPE LENGTH
1. WRAP	10,000 KG	MIN/7.7MT	7,6 MT
2. WRAP	8,272 KG	MIN/8.6MT	16MT
3. WRAP	7,046KG	MIN/9.5MT	25 MT
4. WRAP	6,137 KG	MIN/10.5MT	35 MT
5. WRAP	5,436 KG	MIN/11.4MT	46 MT

ATTENTION!

- * ALWAYS LEAVE THE FIRST FIVE WRAPS ON.
- * DO NOT FORGET TO OPEN THE A-B TANK LINE FROM THE ROPE DRUM CONTROL VALVE.
- * DO NOT FORGET TO OPEN HYDROMOTOR LEAK LINE.

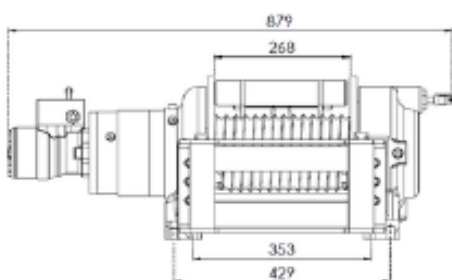

[Standard]
Manual Clutch



[Optional]
Air Clutch

