




CNC EDC-EMC SERIES HYDRAULIC FILTERS




SPECIFIC VALUES

Construction	EDC: Aluminium head / Galvanized coated sheet lid. EMC: Aluminium head / Galvanized coated sheet lid + stud reinforcement
Adhesive	Cast polyester with additives
Operation Pressure	90°C
Fluid	Mineral oils (Viscosity 30 cst)
Nominal Flow Rate	15~1400 lt/min.
Filtration Range	125 μ (304 quality chrome nickel wire)
Connection	G1"-G11/2"-G2"-G21/2"-G3"
Internal Support	Phosphate coated sheet

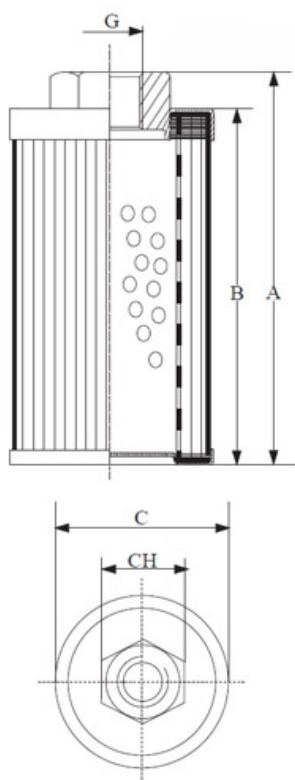

EDC SERIES

CODE	Nominal Flow (p 0,25) lt/min.	G	A	B	C	CH
EDC-005	5	1/4"	82	73	30	17
EDC-015-12	15	1/2"	84	72	64	43
EDC-015	15	1"	84	72	64	43
EDC-025	25	1"	119	107	64	43
EDC-045	45	1"	160	147	64	43
EDC-065	65	1 1/2"	132	116	90	65
EDC-090	90	1 1/2"	189	172	90	65
EDC-125	125	1 1/2"	222	206	90	65
EDC-180	180	2"	263	242	90	65

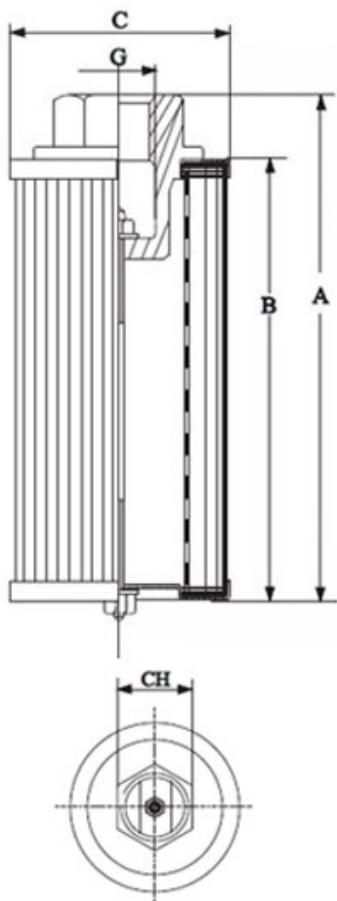

EMC SERIES

CODE	Nominal Flow (p 0,25) lt/min.	G	A	B	C	CH
EMC-015	15	1"	88	66	59	42
EMC-025	25	1"	124	102	59	42
EMC-045	45	1"	164	142	59	42
EMC-065	65	1 1/2"	134	114	82	62
EMC-090	90	1 1/2"	188	168	82	62
EMC-125	125	1 1/2"	222	202	82	62
EMC-150	150	1 1/2"	215	196	97	62
EMC-180	180	1 1/2"	263	242	82	62
EMC-225	225	2"	192	167	130	80
EMC-300	300	2"	225	202	130	80
EMC-500	500	2 1/2"	282	254	130	86
EMC-750	750	3"	271	253	182	98
EMC-1400	1400	3"	523	504	182	98