


CROMSTEEL INDUSTRIES CHROME COATED SHAFTS				
Diameter (mm)	Tolerance (ISO)	Material (DIN)	Weight (kg/m)	
6	f7	Ck 45	0,22	
8	f7	Ck 45	0,39	
10	f7	Ck 45	0,62	
12	f7	Ck 45	0,89	
14	f7	Ck 45	1,20	
15	f7	Ck 45	1,38	
16	f7	Ck 45	1,58	
18	f7	Ck 45	2,00	
20	f7	Ck 45	2,46	
22	f7	Ck 45	2,98	
25	f7	Ck 45	3,85	
28	f7	Ck 45	4,93	
30	f7	Ck 45	5,55	
32	f7	Ck 45	6,31	
35	f7	Ck 45	7,55	
36	f7	Ck 45	7,99	
38	f7	Ck 45	8,90	
40	f7	Ck 45	9,86	
45	f7	Ck 45	12,48	
50	f7	Ck 45	15,41	
50,8	f7	Ck 45	15,90	
55	f7	Ck 45	18,64	
56	f7	Ck 45	19,32	
60	f7	Ck 45	22,18	
63	f7	Ck 45	24,46	
63,5	f7	Ck 45	24,84	
65	f7	Ck 45	26,03	
70	f7	Ck 45	30,19	
75	f7	Ck 45	34,66	
80	f7	Ck 45	39,44	
85	f7	Ck 45	44,52	
90	f7	Ck 45	49,91	
95	f7	Ck 45	55,61	
100	f7	Ck 45	61,62	
105	f7	Ck 45	67,94	
110	f7	Ck 45	74,56	
115	f7	Ck 45	81,49	
120	f7	Ck 45	88,73	
125	f7	Ck 45	96,28	
130	f7	Ck 45	104,14	
140	f7	Ck 45	120,78	
150	f7	Ck 45	138,65	
160	f7	Ck 45	157,75	
200	f7	Ck 45	246,48	

CROMSTEEL INDUSTRIES INDUCTION SHAFTS				
Diameter (mm)	Tolerance (ISO)	Material (DIN)	Weight (kg/m)	
6	f7	Ck 45	0,22	
8	f7	Ck 45	0,39	
10	f7	Ck 45	0,61	
12	f7	Ck 45	0,88	
14	f7	Ck 45	1,20	
15	f7	Ck 45	1,38	
16	f7	Ck 45	1,57	
18	f7	Ck 45	2,00	
20	f7	Ck 45	2,46	
22	f7	Ck 45	2,99	
25	f7	Ck 45	3,85	
25,4	f7	Ck 45	3,97	
28	f7	Ck 45	4,83	
30	f7	Ck 45	5,54	
32	f7	Ck 45	6,31	
35	f7	Ck 45	7,54	
36	f7	Ck 45	7,98	
38	f7	Ck 45	8,89	
40	f7	Ck 45	9,85	
45	f7	Ck 45	12,47	
50	f7	Ck 45	15,40	
50,8	f7	Ck 45	15,90	
55	f7	Ck 45	18,61	
56	f7	Ck 45	19,32	
60	f7	Ck 45	22,18	
63	f7	Ck 45	24,45	
63,5	f7	Ck 45	24,84	
65	f7	Ck 45	26,03	
70	f7	Ck 45	30,19	
75	f7	Ck 45	34,66	
80	f7	Ck 45	39,43	
85	f7	Ck 45	44,52	
90	f7	Ck 45	49,91	
95	f7	Ck 45	55,61	
100	f7	Ck 45	61,62	
105	f7	Ck 45	67,93	
110	f7	Ck 45	74,56	
120	f7	Ck 45	88,73	
200	f7	Ck 45	246,49	

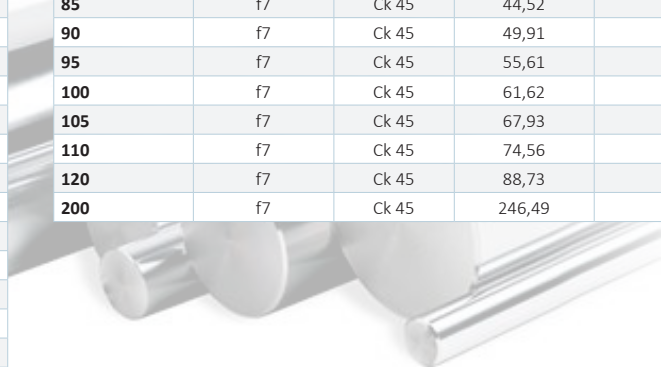

CROMSTEEL INDUSTRIES PIPE ROD				
Inner/Outer Dia. (mm)	Tolerance (ISO)	Material	Weight (kg/m)	
40 / 25	f7	St 44	6,00	
45 / 23	f7	St 44	9,21	
45 / 25	f7	St 44	8,62	
50 / 30	f7	St 44	9,85	
55 / 35	f7	St 44	11,09	
60 / 40	f7	St 44	12,32	
63 / 45	f7	St 44	11,97	
65 / 45	f7	St 44	13,55	
70 / 50	f7	St 44	14,78	

Inner/Outer Dia. (mm)	Tolerance (ISO)	Material	Weight (kg/m)	
75 / 55	f7	St 44	16,02	
80 / 60	f7	St 44	17,25	
90 / 60	f7	St 44	27,73	
90 / 75	f7	St 44	15,25	
105 / 90	f7	St 44	18,02	
110 / 90	f7	St 44	24,64	
135 / 114,7	f7	St 44	31,23	
155 / 134	f7	St 44	37,39	
170 / 149	f7	St 44	41,28	